


Specifications

32" IR ADD-ON TOUCHSCREEN KIT, 10 PTS

Model: AO-TFT32-IR-USB-PNB or -TNB

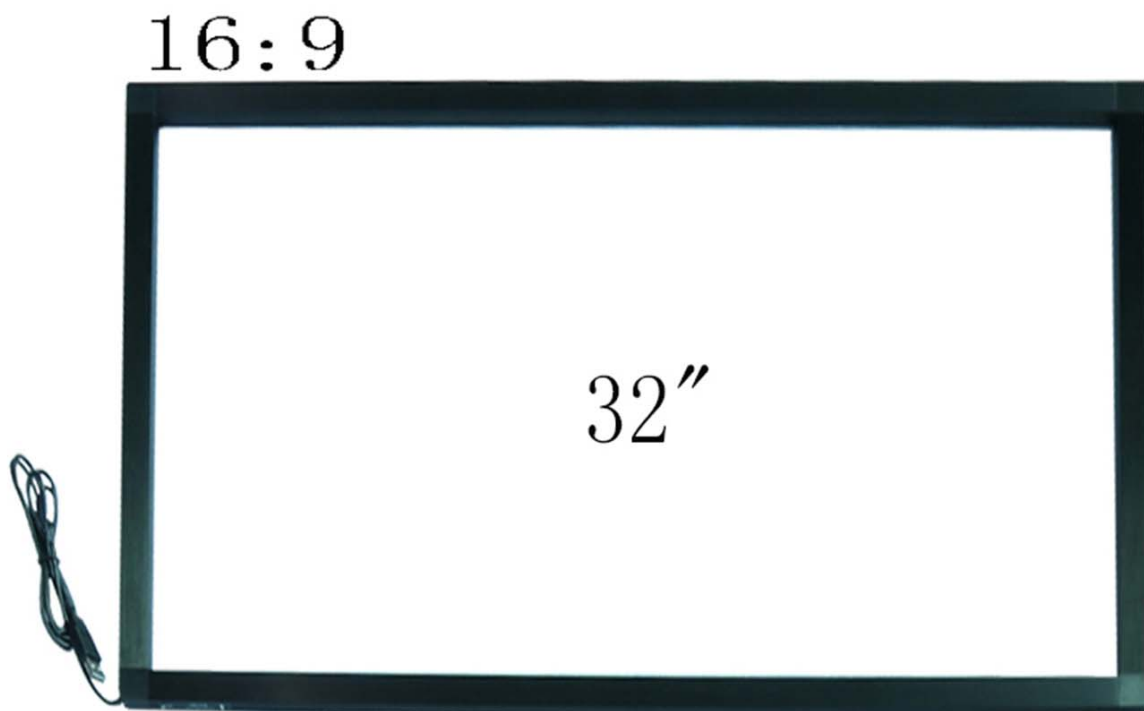

ISO9001 CE FCC RoHS



A1Touch Solution BV

Hogeweg 21
NL-6367 BA Voerendaal
The Netherlands

☎ : +31-(0)45 574 81 90

☎ : +31-(0)45 574 81 91

✉ : info@A1TouchSolution.nl
🌐 : www.A1TouchSolution.nl

Delivery:

Our add-on kit includes: touchscreen with integrated USB controller, USB-A cable 1.45 meter and depending on chosen option: Double sided tape (permanent mounting) or Velcro-tape (temporarily mounting).

Product Features:

1. Precise multi-point (10 points) touching.
2. USB interface, Intelligent automatic calibration.
3. Maintenance free.
4. Aluminium alloy shell with strong stability.
5. Delivered without glass (Tempered glass or Float glass on request).
6. Supporting plug and play for win-7,-8 and -10. (Mac | Linux | Android with driver).
7. No touching tools,no special touching pen is required, only your finger.
8. Fast response(less than 16 ms), no blind area, breakpoints, jump points, pause and other undesirable phenomena

Specifications:

Size: 32" (31.5" active area)

Touch Technology: Infrared Touch

Color: Black

Material: Brushed black aluminium

Dimensions

Outside dimensions frame (wxh) 747.7 x 442.3 +/- 1mm

Inside dimensions frame (wxh) 701.7 x 396.3 +/- 1mm

Active area (wxh) 697.7 x 392.3 mm +/- 1mm

Thickness frame: 9.5 +/- 0.2 mm

Width frame: 23 +/- 0.2 mm

Performance

Resolution(Interpolation): 4096*4096

Ratio: 16:9

Detected touches 10 touches.

Linearity error: 1.5 mm

Response time: <15ms

Mechanical

Input Method: Finger, gloved hand, or opaque object

Touch times: Unlimited

Touch Activation Force: No minimum touch activation force is required.

Minimum Touch Object: 5mm

Environmental suitability

Temperature:	Operating: -20°C ~ 70°C Storage: -40°C ~ 85°C
Relative Humidity:	Operating: 90%(non-condensing at max 40°C) Storage: 90%(non-condensing at max 40°C)
Altitude:	Up to 3000m
Life Time (MTBF):	At least 7-year

Electrical

Scan frequency:	60Hz
Communication interface:	USB 2.0 or RS232
Output Format:	Coordinate output
Touch Accuracy:	2mm (over 90% area)
Operation Voltage:	Typical +DC 5V, +4.75V to +5.25V
Power Supply:	Via USB, power ripple max. 200 mV rms
Power:	<2W, operating current<180mA
Operating System Support:	Windows2000, XP, 7, 8, 10, Android, MAC and Linux.
Agency Approvals:	CE, FCC Class B, RoHS

Applications:

- TV
- Monitor
- Gaming device
- Exhibition
- Education training
- Public query machine
- Self-service machine
- Interactive whiteboard
- Any interactive machine
- And more