




Front view

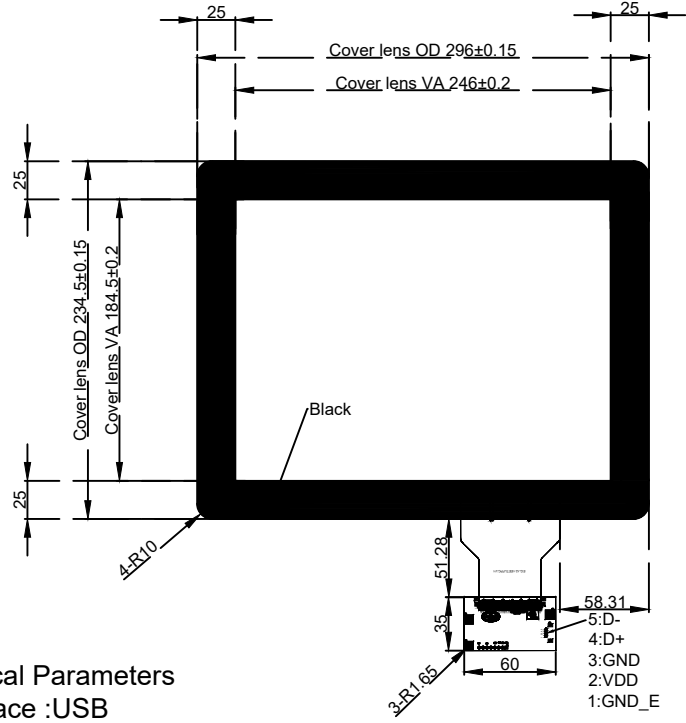

Side view

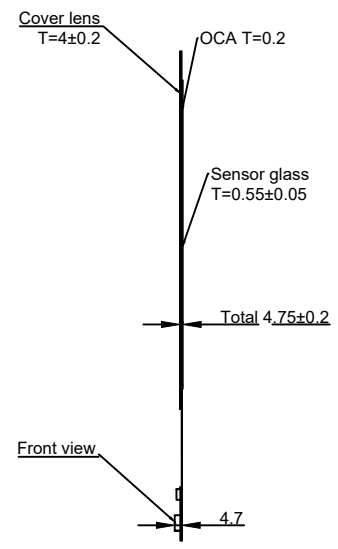

Back view

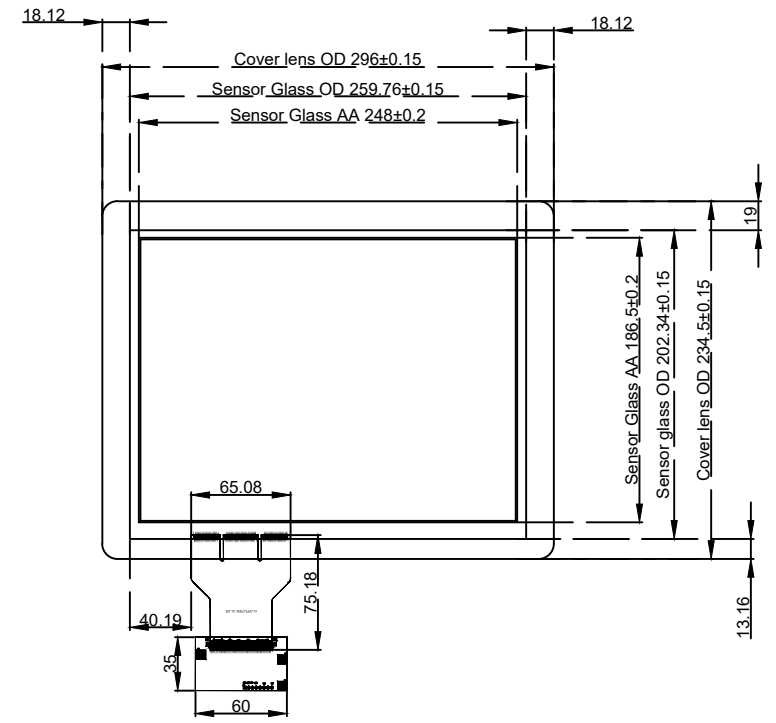

Technical Parameters

- 0: Interface :USB
- 1: Touch point: 10
- 2: Cover lens + Sensor glass + OCA+FPC
- 3: Cover lens Thickness = 3.9 mm
- 4: Sensor glass Thickness = 0.55mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness = 4.65mm
- 7: Sensor Process: Print Process(ITO Pattern) + Laser(Metal Line)
- 8: Input Voltage 3.5V ~ 5.5V. Typical 5V
- 9: Transmittance: >85%
- 10: Surface Hardness: >6H
- 11: Operating Conditions :-10 to 70 °C
- 12: Storage Conditions :-20 to 70 °C
- 13: Relative Humidity: 95% at 60°C, RH Non-condensing
- 14: Dimension tolerance: ± 0.2 mm

AI Touch Solution BV					
Drawing by	OL	2015.08.24	Materials	Glass	12.1(4:3)
Checked by			Scale	1:1	
Approved by			Units	mm	Drawing Name
page 1 of 1				Drawing No.	12.1CTP
				Drawing No.	EG-12.1-016-V1