



1					
1					

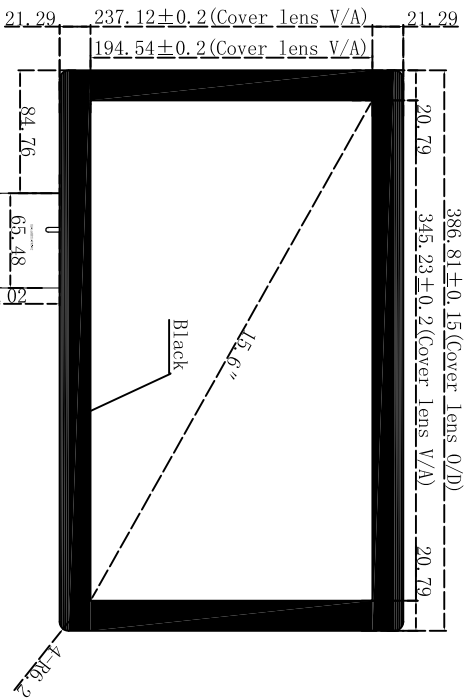


Front view

- 1: TX
- 2: RX
- 3: GND
- 4: VDD
- 5: GND_E

Side view

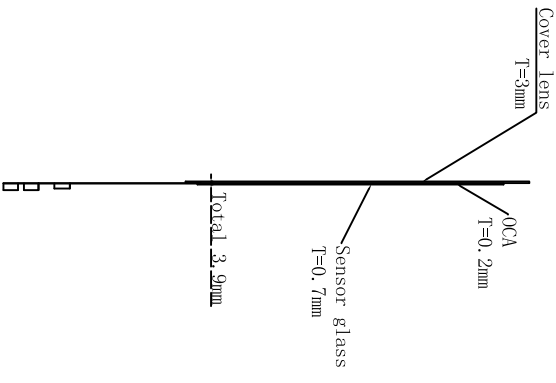

Back view

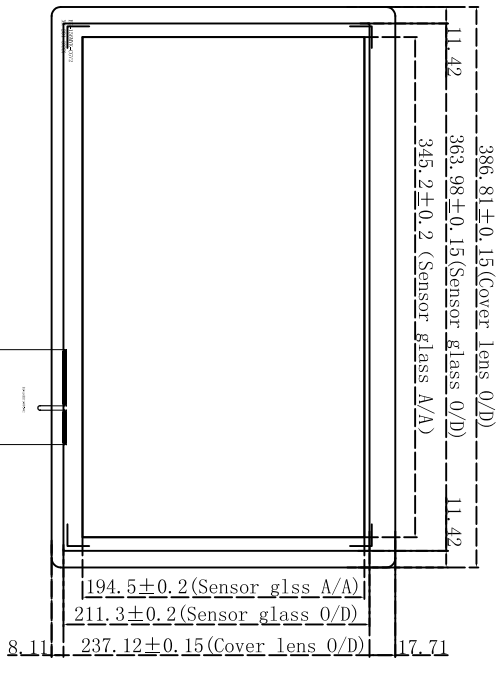

Technical Parameters

0: Interface : USB/UART

- 1: Touch point: 10
- 2: Cover lens + Sensor glass + OCA+PPC
- 3: Cover lens Thickness = 3mm
- 4: Sensor glass Thickness = 0.7mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness = 3.9mm
- 7: Sensor Process: Print Process (ITO Pattern +Metal line)
- 8: Input Voltage 3.5V~5.5V. Typical 5V
- 9: Transmittance: >85%
- 10: Surface Hardness: >6H
- 11: Operating Conditions : -10 to 70 °C
- 12: Storage Conditions : -20 to 70 °C
- 13: Relative Humidity: 95% at 60°C, RH Non-condensing
- 14: Dimension tolerance: ±0.2mm

Drawing By		o1	Materials		Glass
Checked By			Scale		1:1
Approval By			Units		mm

Drawing No.		EG-156MYK-SY-V1	
-------------	--	-----------------	--

Drawing Name		15.6 CTP	
--------------	--	----------	--

Page 1 of 1		Drawing No.	
-------------	--	-------------	--