


Specifications

21.5" TOUCHSCREEN MONITOR, 10 PTS

Model: BFR215

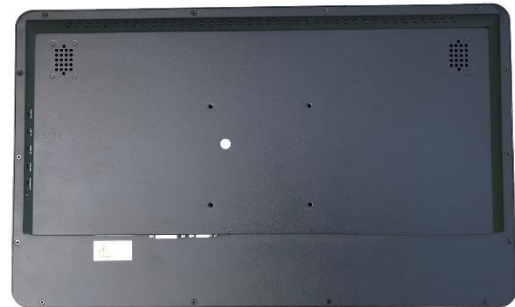

A1Touch Solution BV

Hogeweg 21
NL-6367 BA Voerendaal
The Netherlands

☎ : +31-(0)45 574 81 90

☎ : +31-(0)45 574 81 91

✉ : info@A1TouchSolution.nl

🌐 : www.A1TouchSolution.nl

Delivery:

Our touchscreen monitor standard includes: pcap touchscreen with integrated USB controller with USB-A/B cable 1.8 meter and 220 – 12 Volt Power Supply.

Options:

- VGA cable and/or HDMI cable
- Wall mount or Desktop mount bracket
- Conductive stylus pencil.

Product Features:

1. Bezel free design with glass surface.
2. Precise multi-point (10 points) touching.
3. Toughened glass capacitive screen 16:9 wide display screen
4. Maintenance free.
5. Complete metal monitor with strong stability.
6. Supporting plug and play for win-7,-8 and -10. (Mac | Linux | Android with driver).
7. Unit can be touched with finger, hand gloves or stylus pencil.
8. Fast touch response (less than 10 ms).

Specifications:**General**

Model:	BFR215
Size:	21.5" (21.5" active area)
Panel Type:	TFT-LCD
Backlight:	LED
Display colour:	16.7M
Color:	Black
Material:	Alu/metal housing, Toughened glass cover glass
IP (between touchscreen and frame)	IP65
Mounting Option:	VESA 75x75 and 100x100 mm
Video Inputs	Inputs: VGA/ DVI/ HDMI

Dimensions

Outside dimensions frame (wxhxd)	526.01mm* 317.61mm* 40.8mm
Active area (wxh)	476.64 x 268.11 mm

Display

Native resolution:	1920 x 1080 @60HZ
Ratio:	16:9
Contrast:	3000:1
Brightness:	250 cd/m
Viewing Angle (H/V):	178 /178
Response time:	<18ms

Backlight life:	50.0000 hrs
Control:	OSD Control
Touchscreen	
Touch Technology:	Toughened Projected capacitive Touch (G+G)
Detected touches	10 touches.
Response time:	<10ms
Input Method:	Finger, hand gloves, or conductive stylus
Touch times:	Unlimited
Touch Activation Force:	No minimum touch activation force is required.
Controller type:	EETI chipset 31xx
Operating System Support:	Windows2000, XP, 7, 8, 10, Android, MAC and Linux.

Environment

Temperature:	Operating: 0°C ~ 40°C Storage: -20°C ~ 60°C
Relative Humidity:	Operating: 20-80%(non-condensing at max 40°C) Storage: 10-90%(non-condensing at max 40°C)
Altitude:	Up to 3000m

Electrical

Scan frequency:	60Hz
Operation Voltage:	Typical +DC 12V, +/- 10% (24 volt option).
Power Supply:	110-220V AC to 12Volt DC, min. 2A
Power:	15 W

Packing

Agency Approvals:	CE, FCC, RoHS
Weight net.:	5 kg

Applications:

Finance	Trade
Gaming	Post and telecommunications
Transportation	Tax revenue
Advertisement	Insurance

Drawing:

