


| | | | | |
|---|--|--|--|--|
| 1 | | | | |
| 2 | | | | |
| 3 | | | | |
| 4 | | | | |
| 5 | | | | |
| 6 | | | | |

Front view Side view Back view

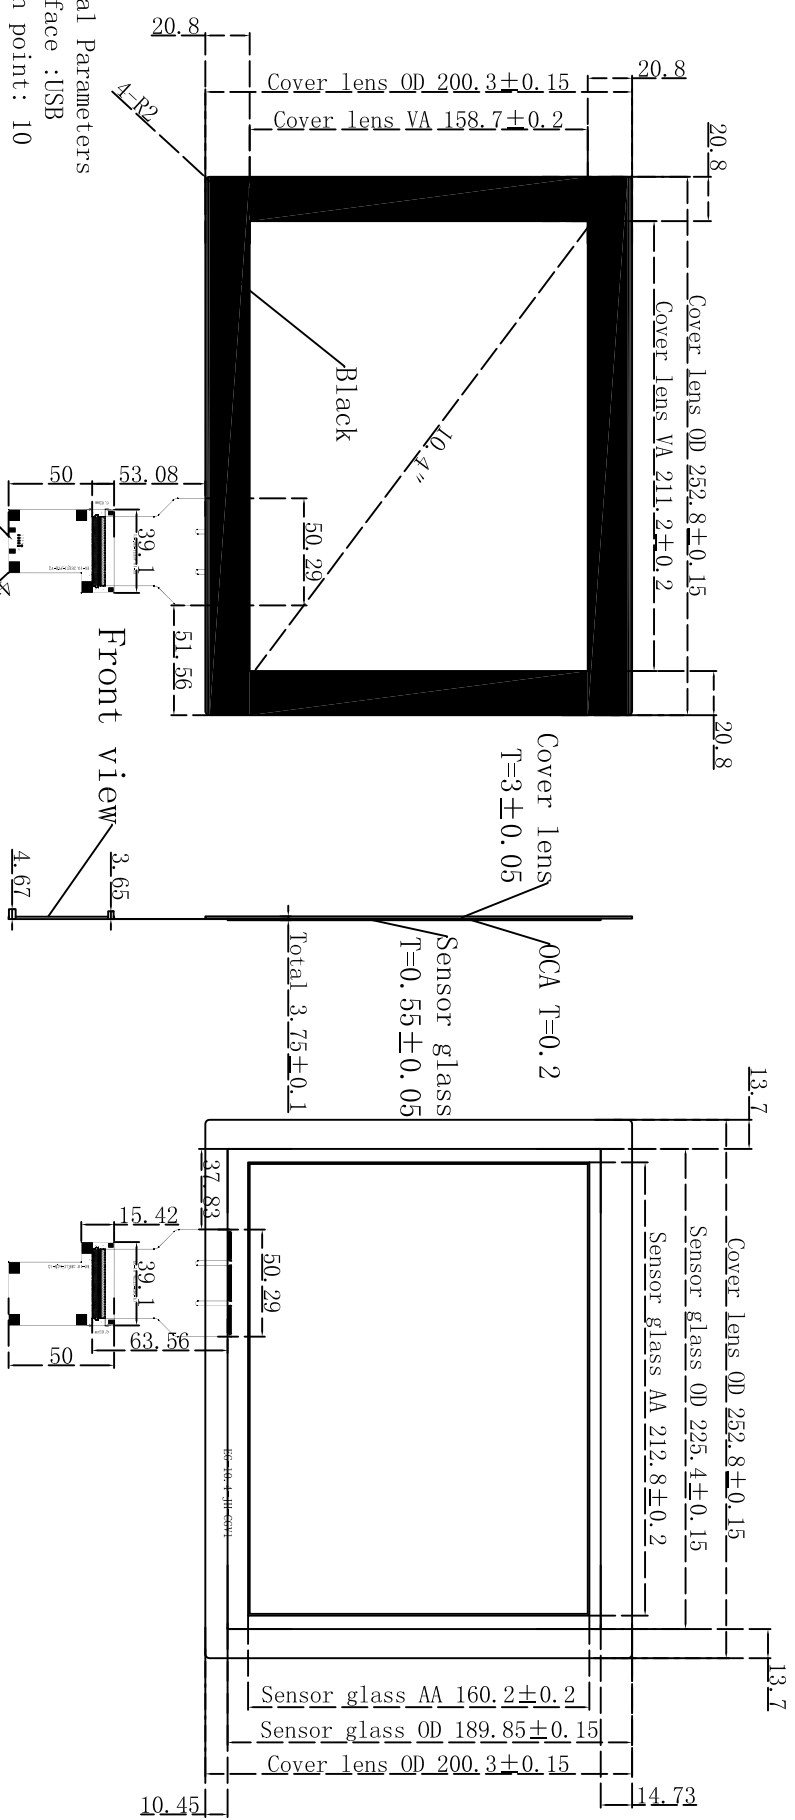

- Technical Parameters
- 0: Interface : USB
 - 1: Touch point: 10
 - 2: Cover lens + Sensor glass + OCA+PFC
 - 3: Cover lens Thickness =3mm
 - 4: Sensor glass Thickness = 0.55mm
 - 5: OCA Thickness = 0.2mm
 - 6: Total Thickness = 3.75mm
 - 7: Sensor Process: Print Process(ITO Pattern) + Laser(Metal Line)
 - 8: Input Voltage 3.5V~5.5V. Typical 5V
 - 9: Transmittance : >85%
 - 10: Surface Hardness : >6H
 - 11: Operating Conditions : -10 to 70 °C
 - 12: Storage Conditions : -20 to 70 °C
 - 13: Relative Humidity : 95% at 60°C, RH Non-condensing
 - 14: Dimension tolerance : ±0.2mm

| | | | | | | | | | |
|----------------------------|--|--|--|-------------|--|---------------|--|------------|--|
| AITouch Solution BV | | | | drawing by | | materials | | Glass | |
| | | | | o1 | | 2015.01.13 | | 1:1 | |
| | | | | checked by | | Scale | | 1:1 | |
| | | | | | | Units | | mm | |
| | | | | Approved by | | Drawing name | | Drawing no | |
| | | | | | | EG-10.4-JH-V1 | | 10.4 CTP | |
| | | | | page 1 of 1 | | Drawing no | | 10.4 CTP | |
| | | | | | | EG-10.4-JH-V1 | | 10.4 CTP | |