

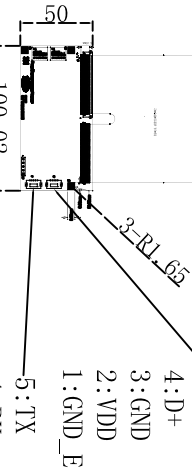
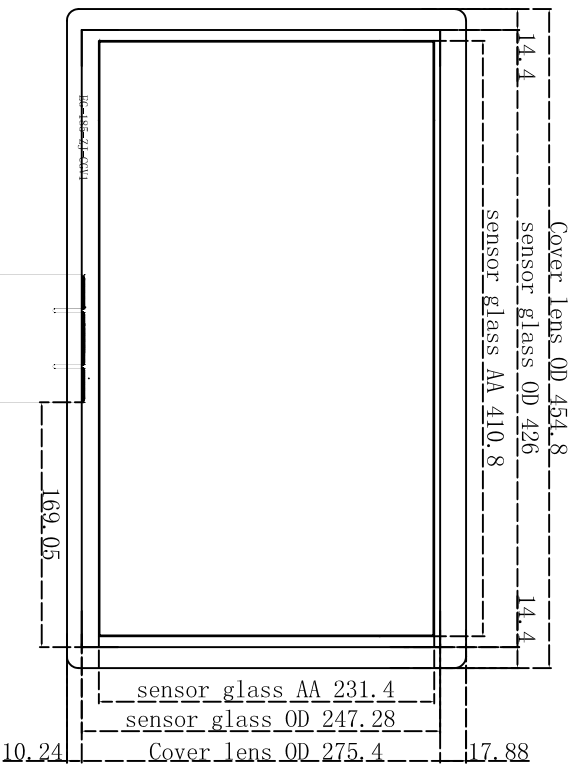
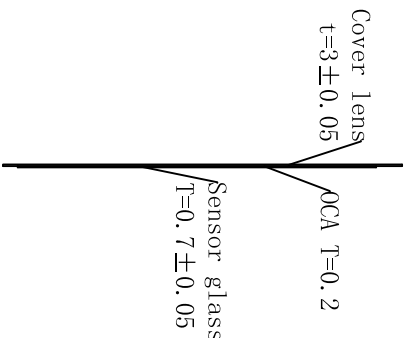


Front view

Side view

Back view

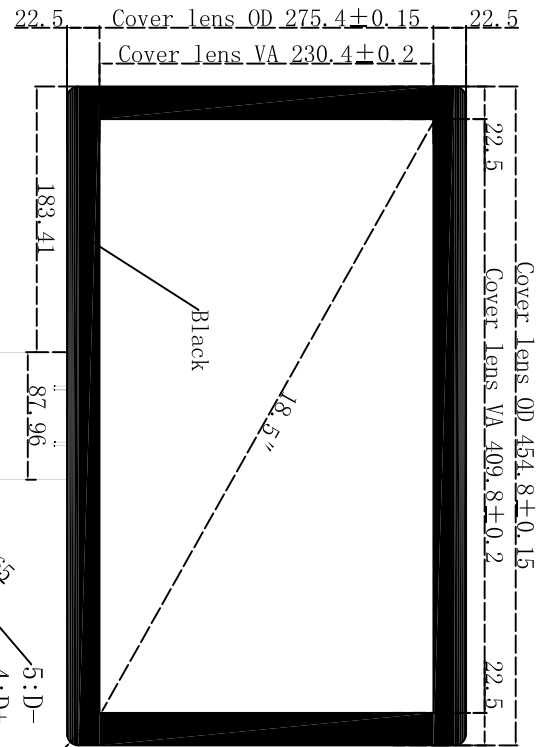

Technical Parameters

- 0: Interface :USB/UART
- 1: Touch point: 10
- 2: Cover lens + Sensor glass + OCA+PPC
- 3: Cover lens Thickness = 3mm
- 4: Sensor glass Thickness = 0.7mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness = 3.9mm
- 7: Sensor Process: Print Process (ITO Pattern) +Laser Ag(Metal line)
- 8: Input Voltage 3.5V~5.5V, Typical 5V
- 9: Transmittance :>85%
- 10: Surface Hardness:>6H
- 11: Operating Conditions :-10 to 70 °C
- 12: Storage Conditions :-20 to 70 °C
- 13: Relative Humidity:95% at 60°C, RH Non-condensing
- 14: Dimension tolerance: ±0.2mm

Alltouch Solution BV			
Drawing By	o1	Materials	Glass
Checked By		Scale	1:1
Approved By		Units	mm
Page 1 of 1		Drawing Name	18.5 CTP
Page 1 of 1		Drawing No.	EG-18.5-ZJ-V1