



Front view

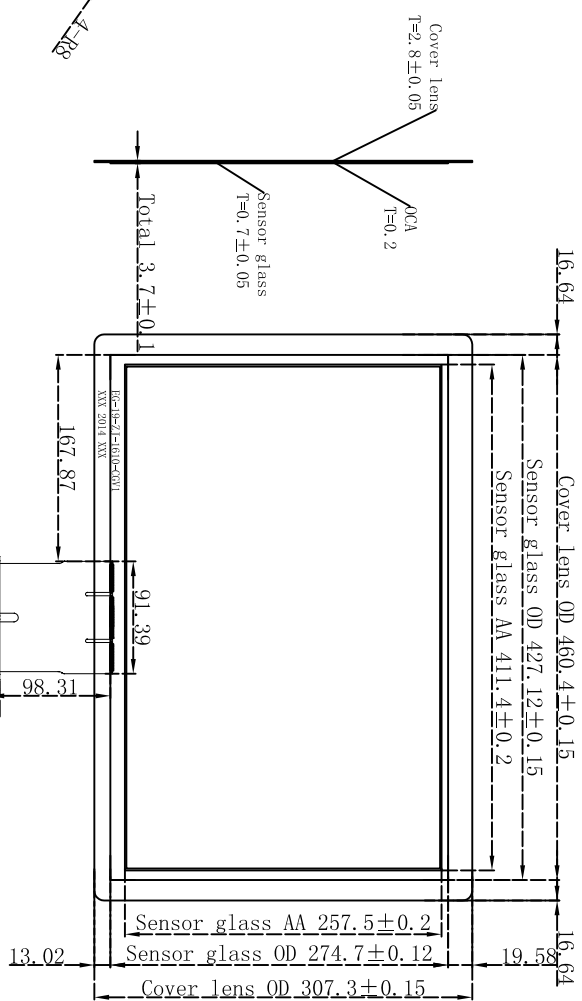

Side view



Back view

Technical Parameters

0:Interface :USB/UART

1: Touch point: 10 (win7 and win8) , (UART touch point:2)

2: Cover lens + Sensor glass + OCA+PPC

3: Cover lens Thickness = 2.8mm

4: Sensor glass Thickness = 0.7mm

5: OCA Thickness = 0.2mm

6: Total Thickness = 3.7mm

7: Sensor Process: Print Process (ITO Pattern) +Laser(Metal line)

8: Input Voltage 3.5V~5.5V. Typical 5V

9:Transmittance:>85%

10: Surface Hardness:>6H

11: Operating Conditions : -10 to 70 °C

12: Storage Conditions : -20 to 70 °C

13: Relative Humidity:95% at 60°C, RH Non-condensing

14: Dimension tolerance:±0.2mm

		Approval By		Page 1 of 1		Drawing No.		EG-19-1610-ZJ-VI	
Drawing By	ol	2014.11.28	Materials	Glass	19" (16:10)		Drawing Name	19 CTP	
Checked By			Scale	1:1					
Approved By			Units	mm					
Alltouch Solution BV									

