





Front View

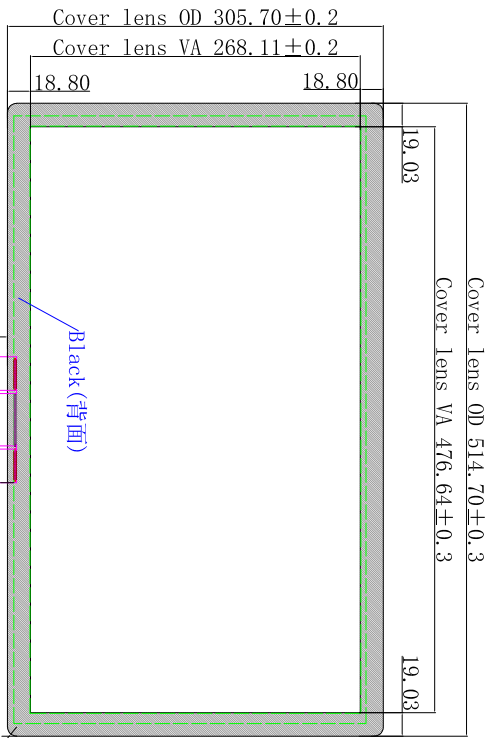

Side View

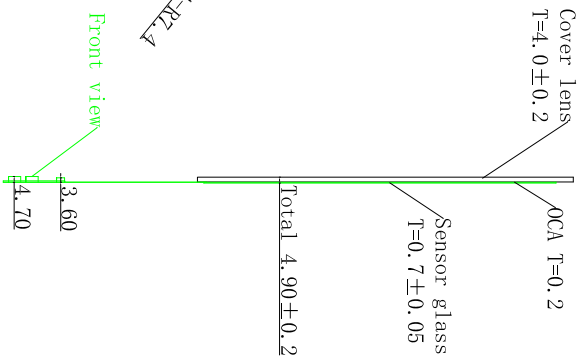

Back View

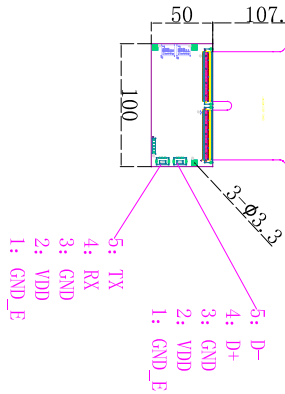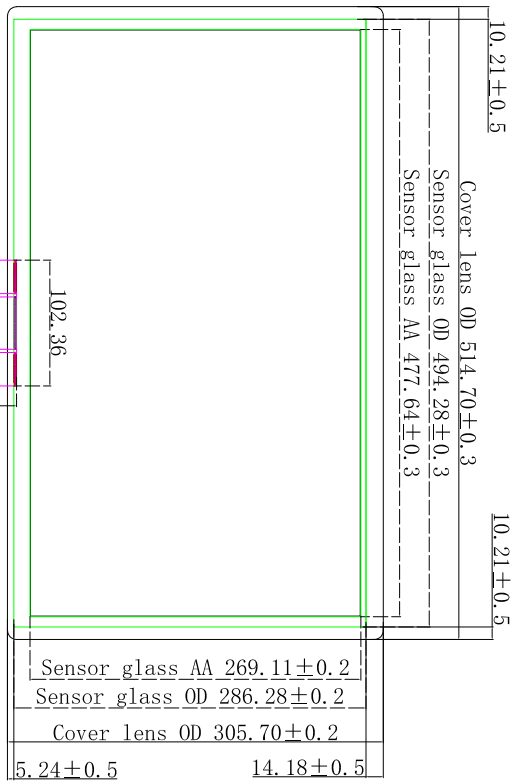

Technical Parameters

- 0: Interface : USB
- 1: Touch point: 10
- 2: Cover lens + Sensor glass + OCA + PPC
- 3: Cover lens Thickness = 4.0mm
- 4: Sensor glass Thickness = 0.7 mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness = 2.7 mm
- 7: Sensor Process: Exposure ITO pattern+laser Ag(metal line)
- 8: Input Voltage 3.5V~5.5V.Typical 5V
- 9: Transmittance: >85%
- 10: Surface Hardness: >6H
- 11: Operating Conditions : -10 to 70 °C
- 12: Storage Conditions : -20 to 70 °C
- 13: Relative Humidity: 95% at 60°C, RH Non-condensing
- 14: Dimension tolerance: $\pm 0.2\text{mm}$

AITouch Solution BV

21.5"

21.5 CTP

Drawing By		Materials		Glass		Drawing Name	
Checked By		Scale		1:1		Drawing No.	
Approval By		Units		mm		EG-21.5-144-V1	
2017.11.24		mm		mm		21.5"	