
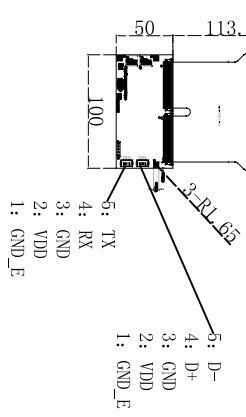


Front view

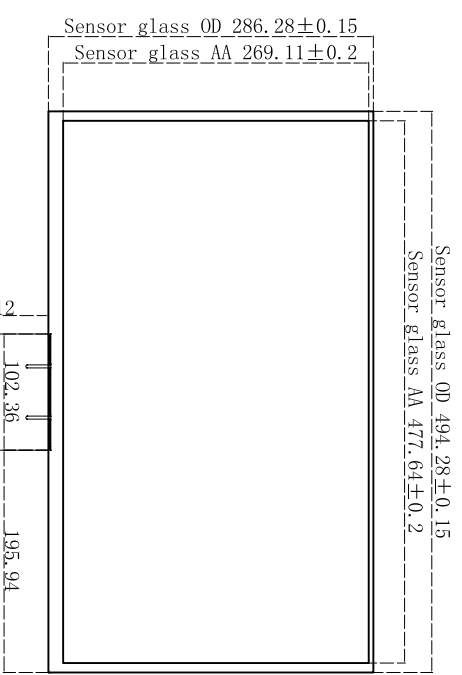

Technical Parameters

- 0: Interface : USB/URAT
- 1: Touch point: 10 (win7 and win8) , (URAT touch point:2)
- 2: Cover lens + Sensor glass + OCA+FPC
- 3: Sensor glass Thickness = 0.7mm
- 4: Sensor Process: Exposure ITO Pattern + Laser Ag (Metal line)
- 5: Input Voltage 3.5V~5.5V. Typical 5V
- 6: Operating Conditions : -10 to 70 °C
- 7: Storage Conditions : -20 to 70 °C
- 8: Relative Humidity: 95% at 60°C, RH Non-condensing
- 9: Dimension tolerance: ± 0.2 mm
- 10: AA=Active Area; OD=Outline Dimension; VA=View Area

0.70

Approval By				ATTouch Solution BV			
Drawing By	o1	Materials	Glass	21.5"			
Checked By		Scale	1:1	21.5 CTP			
Approved By		Units	mm	Drawing No.	EG-21.5-FPC-5962-V1		
Page 1 of 1							