



1	2	3	4	5	6


Front view

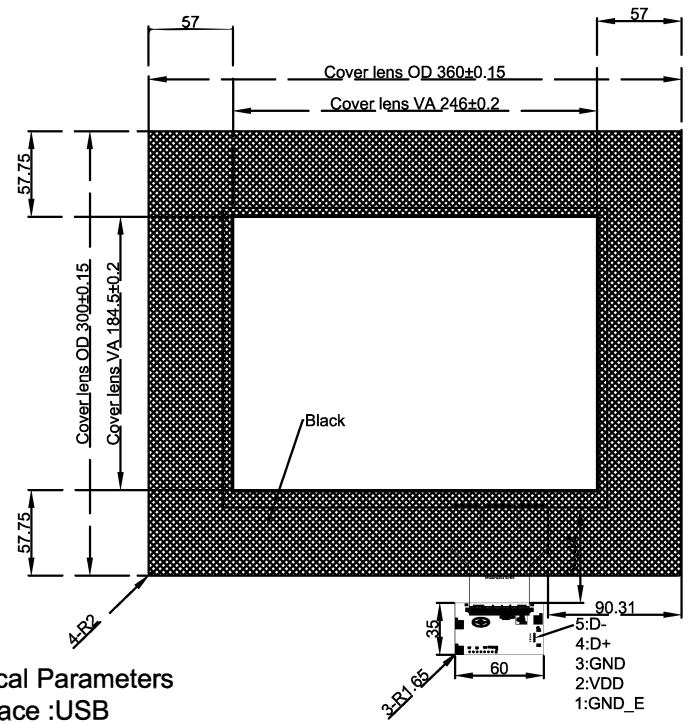

Side view

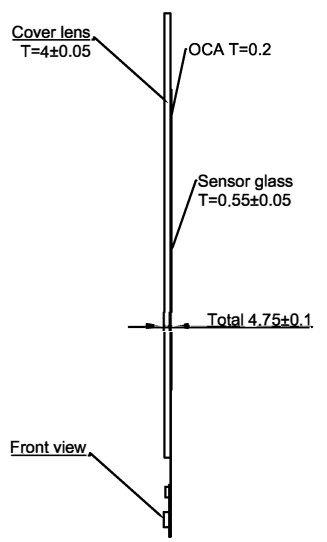

Back view

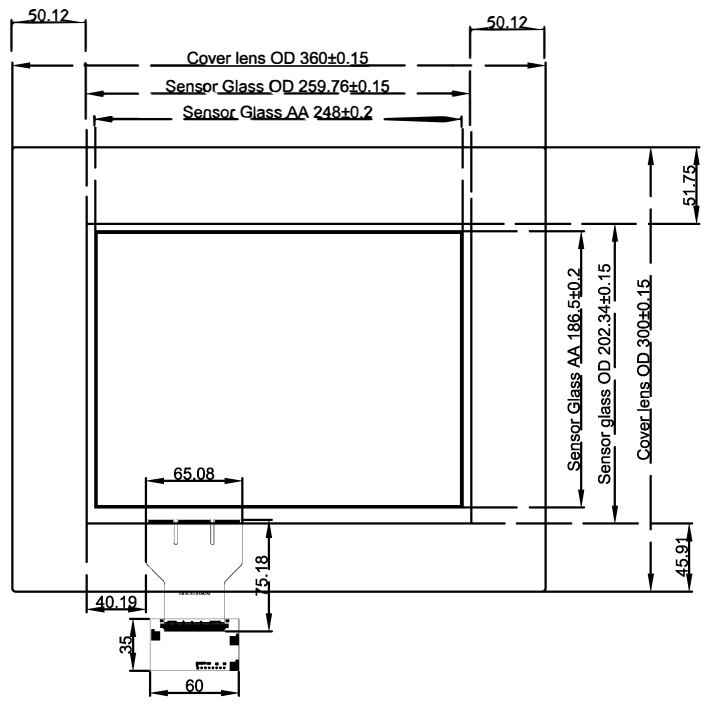

Technical Parameters

- 0:Interface :USB
- 1; Touch point: 10
- 2: Cover lens + Sensor glass + OCA+FPC
- 3: Cover lens Thickness =4mm
- 4: Sensor glass Thickness = 0.55mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness = 4.75mm
- 7: Sensor Process: Print Process(ITO Pattern) + Laser(Metal Line)
- 8: Input Voltage 3.5V~5.5V.Typical 5V
- 9:Transmittance:>85%
- 10: Surface Hardness:>6H
- 11: Operating Conditions :-10 to 70 °C
- 12: Storage Conditions :-20 to 70 °C
- 13: Relative Humidity:95% at 60°C, RH Non-condensing
- 14: Dimension tolerance:±0.2mm

AI Touch Solution BV					
drawing by:	ol	2015.06.26	Material:	Glass	12.1(4:3)
Checked by:			Scale:	1:1	
Approved by:			Units	mm	Drawing name:
Page 1 of 1				Drawing no:	12.1CTP
				ATS12.1-001-V1	

1	2	3	4	5	6
---	---	---	---	---	---